

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 313 231 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
21.05.2003 Bulletin 2003/21

(51) Int Cl.⁷: **H04B 7/005**

(21) Application number: **02025343.1**

(22) Date of filing: **13.11.2002**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
IE IT LI LU MC NL PT SE SK TR**
Designated Extension States:
AL LT LV MK RO SI

• **Kim, Bong-Hoe**
Kyungki-Do, Korea (KR)
• **Hwang, Seung-Hoon**
1-Dong, Seocho-ku, Seoul (KR)

(30) Priority: **16.11.2001 KR 2001071202**

(71) Applicant: **LG ELECTRONICS INC.**
Seoul (KR)

(74) Representative:
TER MEER STEINMEISTER & PARTNER GbR
Patentanwälte,
Mauerkircherstrasse 45
81679 München (DE)


(72) Inventors:
• **Lee, Young-Dae**
Kyungki-Do, Korea (KR)

(54) **Method for controlling transmission power of HS-SCCH in UMTS system**

(57) A method for controlling a power of a shared control channel for high speed downlink shared channel (HS-SCCH) in a system adopting a high speed downlink packet access (HSDPA) technique is disclosed, which can control power of HS-SCCH by using the DPCH channel configured in each UE. Especially, by transmit-

ting power of each sub-frame suitably for each UE, and by setting suitable transmission power of HS-SCCH according to whether it is in soft handover and according to whether it is a primary cell in soft handover, an inter-cell interference can be reduced and power of the base station can be effectively used.

FIG. 4

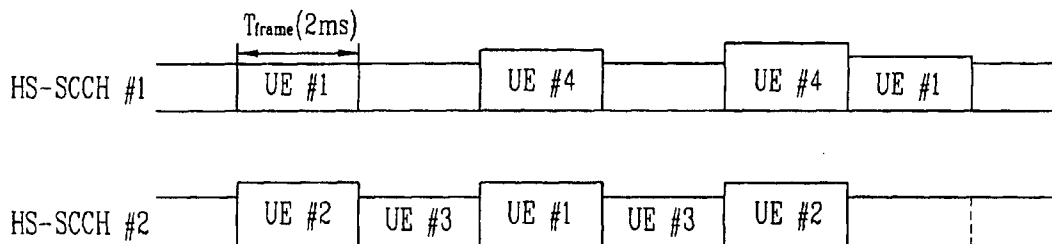

EP 1 313 231 A1

Description

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] The present invention relates to a 3GPP UMTS system and, more particularly, to a method for controlling a power of a shared control channel for high speed downlink shared channel (HS-SCCH) in a system adopting a high speed downlink packet access (HSDPA) technique.

2. Description of the Background Art

[0002] In general, a standard system of a third generation partnership project (3GPP) proposes a new high speed downlink shared channel (HS-DSCH) in order to support a high speed packet data service. The HS-DSCH is used in a UMTS system for Release 5 which specifies a high speed downlink packet access (HSDPA).

[0003] Unlike a W-CDMA system in 3GPP technical specifications for Release 99/Release 4, the HS-DSCH uses a short transmission time interval (TTI) (3 slot, 2 ms) and supports diverse modulation code sets (MCS) in order to support a high data rate.

[0004] Thus, an optimal data transmission performance can be improved by selecting the most suitable MCS for a radio channel condition, for which a hybrid ARQ (HARQ) technique is adopted which combines an automatic repeat request (ARQ) technique and a channel coding technique.

[0005] The HS-DSCH transmits high speed user data to different users for every sub-frame of 2msec. Accordingly, in order for a terminal to receive the user data over the HS-DSCH, a shared control channel for HS-DSCH (HS-SCCH) and a dedicated physical channel (DPCH) should be configured.

[0006] The HS-SCCH, a physical channel, is a type of a downlink common control channel for supporting the HSDPA technique. The channel is used to transmit a UE ID (User Equipment Identification) and control information, whereby the terminal can receive the HS-DSCH transmitting the high speed user data. The terminal monitors the UE ID transmitted over the HS-SCCH to recognize whether there is data the terminal is to receive, and then, if there is data the terminal is to receive, receives the user data transmitted over the HS-DSCH by using the control information received from the HS-SCCH. Furthermore, the UE ID and the control information are transmitted for every sub-frame (2ms) of the HS-SCCH. A Node B (a base station) to which a cell transmitting the HS-DSCH belongs generates the control information transmitted over the HS-SCCH.

[0007] Figure 1 is a structure of a sub-frame of the control information transmitted over the HS-SCCH.

[0008] As shown in Figure 1, the control information is roughly classified into transport format and resource related information (TFRI) and HARQ related information. The TFRI includes information related to a transport channel set size, modulation, a coding rate and the number of multicodes for HS-DSCH, and the HARQ related information includes information such as a block number and a redundancy version. Besides, UE ID is transmitted over HS-SCCH.

[0009] Figure 3 is a drawing illustrating a transmission timing of the HS-SCCH and the HS-DSCH.

[0010] As shown in Figure 3, after the UE ID and the control information are transmitted over the HS-SCCH, a data is transmitted over the HS-DSCH.

[0011] One or more HS-SCCHs are configured in one cell. In particular, if there are many UEs supporting the HSDPA technique in a cell, multiple HS-SCCH channels should be configured in one cell so as to efficiently provide data services.

[0012] In the conventional techniques, the common control channel is transmitted with a power level so high as to be received at a cell boundary.

[0013] However, in the case that the HS-SCCH is transmitted with such a high power as in the conventional techniques, an inter-cell interference is increased, and since a large amount of the Node B power (base station power) should be assigned for the transmission of the HS-SCCH, the Node B power is wasted.

[0014] The above references are incorporated by reference herein where appropriate for appropriate teachings of additional or alternative details, features and/or technical background.

SUMMARY OF THE INVENTION

[0015] Therefore, an object of the present invention is to provide a method for controlling a transmission power of a control channel for a channel shared by plural users, which is shared with timeslot by plural users.

[0016] More preferably, the object of the present invention is to provide a method for setting transmission power of the timeslot of the control channel in relation to the transmission power of a channel dedicated to a user that uses the timeslot. Wherein, the control channel may be HS-SCCH and the channel shared by plural users may be HS-DSCH and the channel dedicated to a user may be DL DPCH of an UMTS system.

[0017] Another object of the present invention is to provide a method for controlling a transmission power of an HS-SCCH that is capable of controlling a power of an HS-SCCH by using a downlink DPCH channel configured for every user equipment.

[0018] Still another object of the present invention is to provide a method for controlling a transmission power of an HS-SCCH that is capable of reducing an inter-cell interference and effectively using power of a base station by transmitting transmission power of each sub-frame of HS-SCCH suitable for each terminal.

[0019] To achieve at least the above objects in whole or in parts, there is provided a method for controlling a transmission power of an HS-SCCH including the steps of: receiving a transmit power control (TPC) command from a mobile station; determining transmission power of a downlink dedicated physical channel (DL DPCH) based on the received TPC command; and determining transmission power of a shared control channel for HS-DSCH (HS-SCCH) transmitted to each mobile station by using a power offset value related to transmission power of the DL DPCH.

[0020] Preferably, the transmission power for a sub-frame of HS-SCCH is offset relative to the transmission power for a field of DL DPCH.

[0021] In addition, the transmission power for a slot in a sub-frame of HS-SCCH is offset relative to the transmission power for a corresponding slot of DL DPCH.

[0022] Preferably, different power offset is applied to transmission power of HS-SCCH according to whether UE is in soft handover or not.

[0023] Preferably, different power offset is applied to transmission power of HS-SCCH according to whether UE is in soft handover or not, and if the UE is in soft handover, according to whether the cell transmitting the HS-SCCH is primary or not.

[0024] Preferably, transmission power of the HS-SCCH is determined by a relative power offset value of one field power among a data field, a TFCI field, a TPC field and a pilot field of DL DPCH.

[0025] To achieve at least these advantages in whole or in parts, there is further provided a method for controlling transmission power of an HS-DSCH in the HSDPA system where mobile stations receive control information transmitted over HS-SCCH by node B and then receive user data transmitted over HS-DSCH using the control information, wherein the transmission power of HS-SCCH is adjusted to power level required for each mobile station, based on the power control of DL DPCH configured for each mobile station.

[0026] Preferably, transmission power of HS-SCCH is determined by a power offset relative to the transmission power of the DL DPCH for specific user equipment, and transmission power of each sub-frame of HS-SCCH is determined by a power offset value for each field power of DL DPCH.

[0027] Preferably, a radio network controller (RNC) sends the power offset value to the Node B, and the Node B determines the transmission power of the HS-SCCH using the received power offset value.

[0028] Preferably, transmission power of the HS-SCCH is determined by using different power offset values according to whether a corresponding UE is in soft handover of its DL DPCH.

[0029] Preferably, the radio network controller (RNC) sends the different power offset values to the Node B, and the Node B determines the transmission power of HS-SCCH by selecting one of those power offset values according to whether the UE is in soft handover.

[0030] Preferably, a different power offset is applied to transmission power of the HS-SCCH according to whether UE of a specific terminal is in soft handover or not and according to whether a cell transmitting HS-SCCH is primary or not.

[0031] Preferably, the power offset values includes: a first power offset value for a case that UE is not in soft handover; a second power offset value for a case that UE is in soft handover and a base station cell is primary; and a third power offset value for a case that UE is in soft handover and a base station cell is non-primary.

[0032] Preferably, the RNC sends the power offset values to the Node B (base station), and the Node B determines the transmission power of the HS-SCCH by selecting one of power offset values according to whether the UE is in soft handover and the cell transmitting HS-SCCH is primary.

[0033] Preferably, the transmission power of HS-SCCH is determined by a power offset value of one of a data field, a TFCI field, a TPC field and a pilot field of the DL DPCH.

[0034] Preferably, the power offset values includes: a first power offset value for a case that UE is not in soft handover; a second power offset value for a case that UE is in soft handover and a base station cell is primary; and a third power offset value for a case that UE is in soft handover and a base station cell is non-primary.

[0035] Additional advantages, objects, and features of the invention will be set forth in part in the description which follows and in part will become apparent to those having ordinary skill in the art upon examination of the following or may be learned from practice of the invention. The objects and advantages of the invention may be realized and attained as particularly pointed out in the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0036] The invention will be described in detail with reference to the following drawings in which like reference numerals refer to like elements wherein:

Figure 1 is a drawing illustrating a structure of control information transmitted over HS-SCCH;

Figure 2 is a drawing illustrating signaling of HS-SCCH for transmitting the control information;

Figure 3 is a drawing illustrating transmission timing of HS-SCCH and HS-DSCH;

Figure 4 is a drawing illustrating a power determining method of HS-SCCH in accordance with the present invention;

Figure 5 is a drawing illustrating determining a relative power transmission of HS-SCCH to a DL DPCH of Figure 4; and

Figure 6 is a drawing illustrating determining power transmission of HS-SCCH in soft handover in a radio access network structure.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0037] In general, HS-SCCH is divided into a plurality of sub-frames ($T_{\text{frame}}-2\text{ms}$), and each sub-frame transmits control information dedicated to specific UE. Using such characteristics, in the present invention, as shown in Figure 4, unlike a general common control channel, each sub-frame of HS-SCCH is transmitted with required power for each UE (UE#1-UE#4).

[0038] For this purpose, in the present invention, the power control of HS-SCCH is performed by using the power control of DPCH for each UE. That is, according to the power control of downlink (DL) and uplink DPCH, the transmission power of HS-SCCH can be adjusted. In detail, it is constructed such that the transmission power of HS-SCCH is operated by a power offset related to the transmission power of DL DPCH.

[0039] The DL DPCH consists of a data field, a TFCI field, a TPC field and a pilot field. Thus, slot transmission power of a specific sub-frame of HS-SCCH can be determined by a power offset for transmission power of one of the DL DPCH fields.

[0040] Figure 5 is a drawing illustrating a method of determining transmission power of HS-SCCH for the downlink DPCH in accordance with one embodiment of the present invention.

[0041] As shown in Figure 5, the transmission power for each slot in a sub-frame of HS-SCCH is offset relative to the transmission power for one field of the corresponding slot of DL DPCH. Since the DL DPCH changes the transmission power for every one slot according to a power control command transmitted from the UE, resultantly, the transmission power of each slot of HS-SCCH is also changed to transmission power suitable to each UE. Therefore, it can be said that the power transmission of HS-SCCH is controlled by the TPC command transmitted for the power control of DL DPCH from the UE.

[0042] Figure 6 is a drawing illustrating a structure of a radio access network in soft handover between Nodes B in the RNC.

[0043] As shown in Figure 6, the RNC existing in the UMTS radio access network manages dedicated radio resources allocated to each mobile station (UE) in the radio network subsystem (RNS).

[0044] If the mobile station (UE) is moved from a first base station (Node B1) to a second base station (Node B2) in the RNC, first and second base stations (Node B1 and Node B2), respectively, demodulate signals received from the UE and send demodulated DPCH frames to the RNC. Then, the RNC selects the best one from the received frames. In this manner, the mobile station can continuously maintain the DPCH channel by communicating with the two base stations (Node B1 and Node B2) simultaneously.

[0045] In the radio access network structure as shown in Figure 6, the DL DPCH is transmitted in different two

cells, and HS-SCCH is transmitted only in a cell belonging to the first base station (Node 1). Thus, in case of occurrence of a soft handover, operation of the HS-SCCH power control should be taken into account.

[0046] That is, as shown in Figure 6, if DPCH of the UE is in soft handover, power control of associated DL DPCHs is performed in consideration of combining at the UE. In this respect, however, when the DL DPCH is in soft handover, HS-SCCH is not possibly in soft handover, this situation needs to be considered in determining the transmission power.

[0047] Therefore, in order to prevent an increase in an error rate of HS-SCCH that can possibly occur in the soft handover of DL DPCH, the transmission power of HS-SCCH should be increased.

[0048] A method for controlling transmission power for HS-SCCH in the soft handover of DL DPCH will now be described.

[0049] In the present invention, when determining the power offset of HS-SCCH, different power offset values are used according to whether DL DPCH is in soft handover or not.

[0050] For this purpose, the RNC should send a power offset value (P0shcch_normal) for the case of not being in a soft handover and a power offset value (P0shcch_sho) for the case of being in a soft handover to the Node B (Node B1 in Figure 6) over an Iub (interface between the control station and base station).

[0051] Thereafter, the Node B determines the transmission power of HS-SCCH by using one of the two power offset values according to whether the DL DPCH is in soft handover.

[0052] In general, in order to minimize occurrence of interference due to the DPCH transmitted from a plurality of cells in the soft handover, a 3GPP WCDMA uses a site selection diversity transmit (SSDT) technique.

[0053] With the SSDT technique, in the soft handover, the UE selects a cell with the highest received signal power code (RSCP) value of a common pilot channel (CPICH) among active cells as a primary cell, designates remaining cells as non-primary cells, and transmits an ID of the primary cell to the active cells.

[0054] And then, the primary cell transmits the DPCH data, while the non-primary cells temporarily suspend transmission of DPCH data. The UE periodically measures the RSCP of the CPICH and periodically transmits an SSDT ID of the primary cell to every active cell. At this time, the UE transmits the primary cell ID over a feedback information (FBI) field of DPCH.

[0055] Thus, in the present invention, whether a cell transmitting HS-SCCH is primary or non-primary, as well as whether the UE is in soft handover, is considered by utilizing the SSDT method. Irrespective of whether the DPCH is operated by SSDT, this method uses only an uplink signaling over the FBI field used in the SSDT.

[0056] For this purpose, the RNC should send a power offset value (P0shcch_normal) for the case of not being in soft handover, a power offset value

(P0shcch_primary) for the case of being primary cell in soft handover, and a power offset value (P0shcch_nonprimary) for the case of being non-primary cell in soft handover to the corresponding Node B (Node B1 in Figure 6) on the lub.

[0057] Thereafter, by using the SS DT cell ID transmitted by the UE, the Node B selects one of the three power offset values according to whether the UE is in soft handover and according to whether the cell is primary in soft handover, to determine the transmission power of HS-SCCH.

[0058] As aforementioned, the DL DPCH consists of the data field, the TFCI field, the TPC field and the pilot field, and the transmission power of HS-SCCH is determined by a power offset for transmission power of one of those fields.

[0059] In the above descriptions, the terminal, the mobile station and the UE are used with the same meaning.

[0060] As so far described, the method for controlling transmission power of HS-SCCH of the present invention can control power of HS-SCCH by using the DPCH channel configured in each UE.

[0061] Especially, by transmitting power of each sub-frame suitably for each UE, and by setting suitable transmission power of HS-SCCH according to whether it is in soft handover and according to whether it is a primary cell in soft handover, an inter-cell interference can be reduced and power of the base station can be effectively used.

[0062] The foregoing embodiments and advantages are merely exemplary and are not to be construed as limiting the present invention. The present teaching can be readily applied to other types of apparatuses. The description of the present invention is intended to be illustrative, and not to limit the scope of the claims. Many alternatives, modifications, and variations will be apparent to those skilled in the art. In the claims, means-plus-function clauses are intended to cover the structure described herein as performing the recited function and not only structural equivalents but also equivalent structures.

Claims

1. A method for controlling transmission power of a control channel for a channel shared by plural users, comprising:

determining transmission power of a channel dedicated to a user,
 setting transmission power of a timeslot of said control channel in relation to said transmission power of a channel dedicated to a user that uses the timeslot.
 transmitting signals over said control channel with the set power.

2. The method of claim 1, wherein said control channel is HS-SCCH and said channel shared by plural users is HS-DSCH and said channel dedicated to a user is DL DPCH.

3. The method of claim 1, wherein a different power offset is applied to said transmission power of said timeslot whether the UE of the user occupying said timeslot is in soft handover or not.

4. The method of claim 3, wherein a different power offset is applied to said transmission power of said timeslot whether the cell transmitting said a control channel is primary cell or not to the UE of the user occupying said timeslot.

5. The method of claim 4, wherein the power offset values comprises:

a first power offset value for a case that the UE is not in soft handover;
 a second power offset value for a case that the UE is in soft handover and a base station cell is primary; and
 a third power offset value for a case that UE is in soft handover and a base station cell is non-primary.

6. A method for controlling a transmission power of an HS-SCCH comprising:

receiving a transmit power control (TPC) command from a mobile station;
 determining transmission power of a downlink dedicated physical channel (DL DPCH) based on the received TPC command; and
 determining transmission power of a shared control channel for HS-DSCH (HS-SCCH) transmitted to each mobile station by using a power offset value related to transmission power of the DL DPCH.

7. The method of claim 6, wherein the transmission power for a sub-frame of HS-SCCH is offset relative to the transmission power for a field of DL DPCH.

8. The method of claim 7, wherein the power offset value is determined by a power offset value relative to transmission power of a pilot field among the fields of DL DPCH.

9. The method of claim 6, wherein different power offset is applied to transmission power of HS-SCCH according to whether UE is in soft handover or not.

10. The method of claim 6, wherein the transmission power of HS-SCCH is determined by using a different power offset value according to whether US is

in soft handover and according to whether the cell transmitting the HS-SCCH is primary or not.

11. The method of claim 10, wherein the power offset values comprises:

a first power offset value for a case that UE is not in soft handover;
a second power offset value for a case that UE is in soft handover and a base station cell is primary; and
a third power offset value for a case that UE is in soft handover and a base station cell is non-primary.

12. The method of claim 6, wherein the transmission power of HS-SCCH is determined by a relative power offset value to power of one of a data field, a TFCI field, a TPC field and a pilot field of a DL DPCH. (downlink dedicated physical channel).

13. A method for controlling transmission power of an HS-SCCH in the HSDPA system where mobile stations receive control information transmitted over HS-SCCH by node B and then receive user data transmitted over HS-DSCH using the control information,

wherein the transmission power of HS-SCCH is adjusted to power level required for each mobile station, based on the power control of DL DPCH configured for each mobile station.

14. The method of claim 13, wherein the transmission power of HS-SCCH is determined by a relative power offset to the transmission power of DL DPCH.

15. The method of claim 14, wherein the transmission power for a sub-frame of HS-SCCH is offset relative to the transmission power for a field of DL DPCH.

16. The method of claim 13, wherein a different power offset is applied to transmission power of HS-SCCH according to whether UE is in soft handover or not.

17. The method of claim 13, wherein the transmission power of HS-SCCH is determined by using a different power offset value according to whether UE is in soft handover and according to whether the cell transmitting the HS-SCCH is primary or not.

18. The method of claim 17, wherein the power offset values comprises:

a first power offset value for a case that UE is not in soft handover;
a second power offset value for a case that UE is in soft handover and a base station cell is primary; and

a third power offset value for a case that UE is in soft handover and a base station cell is non-primary.

19. The method of claim 13, wherein the transmission power of HS-SCCH is determined by a relative power offset value to power of one of a data field, a TFCI field, a TPC field and a pilot field of a DL DPCH (downlink dedicated physical channel).

FIG. 1




FIG. 2

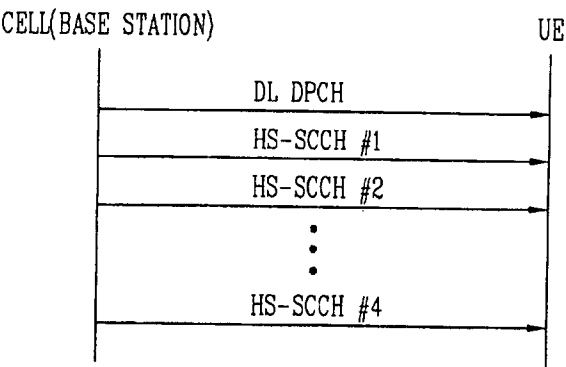


FIG. 3

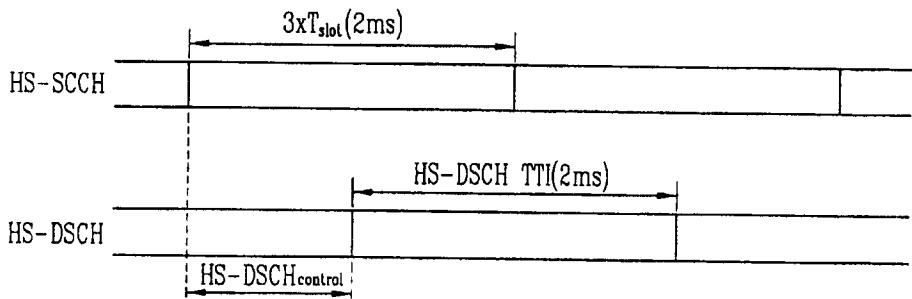


FIG. 4

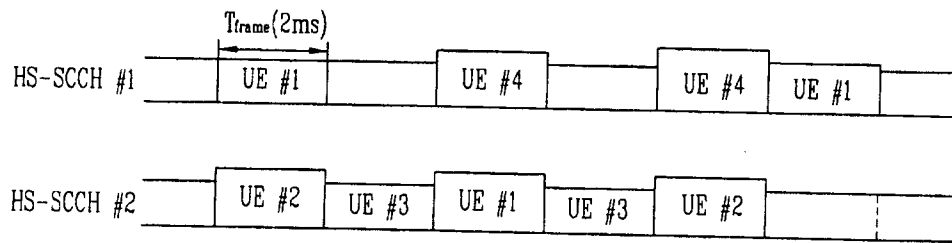


FIG. 5


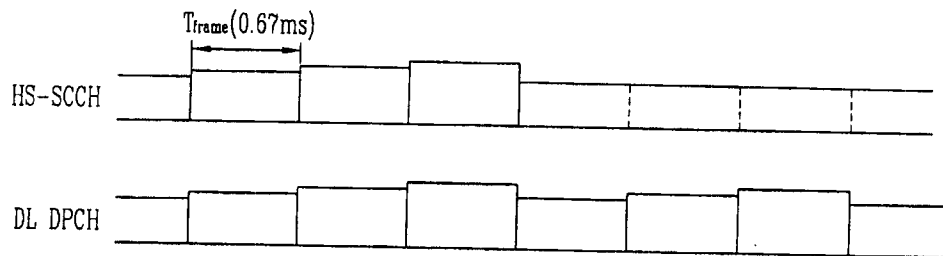


FIG. 6



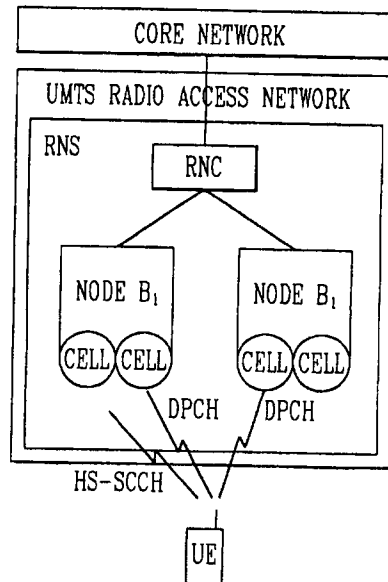

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 02 5343

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	MOTOROLA: "CONTROL CHANNEL STRUCTURE FOR HIGH SPEED DSCH (HS-DSCH)" TSGR1/R2-12A010021, XX, XX, 5 April 2001 (2001-04-05), pages 1-5, XP002206396 * paragraphs [03.0]-[03.1] * ---	1-18	H04B7/005
A	LUCENT TECHNOLOGIES: "Text Proposal for the HSDPA Technical Report" TSGR1#17(00)1384, 21 November 2000 (2000-11-21), XP002175651 Retrieved from the Internet: <URL:http://www.3gpp.org/ftp/tsg_ran/WG1_R1/TSGR1_17/Docs/PDFs/R1-00-1384.pdf> [retrieved on 2001-08-23] * paragraph [6.7.2] * ---	1-18	
A	EP 1 059 736 A (LUCENT TECHNOLOGIES INC) 13 December 2000 (2000-12-13) * abstract * * paragraphs [0021]-[0023] * ---	1-18	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
A	EP 0 993 128 A (MOTOROLA INC) 12 April 2000 (2000-04-12) * abstract * * paragraphs [0015]-[0017] * -----	1-18	H04B
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 13 March 2003	Examiner Lustrini, D
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 (03.02) (P4/C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 02 5343

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

13-03-2003

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
EP 1059736	A	13-12-2000	US	6434367 B1	13-08-2002
			AU	3795100 A	14-12-2000
			BR	0003305 A	20-02-2001
			CA	2310428 A1	11-12-2000
			CN	1277524 A	20-12-2000
			EP	1059736 A2	13-12-2000
			JP	2001036466 A	09-02-2001

EP 0993128	A	12-04-2000	EP	0993128 A1	12-04-2000

EPO FORM P459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82